



Client Date Qty
 Project Type PO#

LS-ARCH-EXT-120V-R



Spécifications

Model	195mm	225mm
Power	20W	40W
Voltage	120VAC	120VAC
Lumens	1422Lm(RGBW) 3077Lm(CCT)	2464Lm(RGBW) 5518Lm(CCT)
CCT	2.7K,3K,3.5K,4K,5K,RGBW	2.7K,3K,3.5K,4K,5K,RGBW
Dimensions	D195*H180mm	D225*H220mm
Weight	3.1Kg	4.5Kg
Control	DMX512/0-10V	DMX512/0-10V
Operating Temperature	-40°C to 55°C	-40°C to 55°C
Protection	IP65	IP65

Description

The spotlight of choice with a narrow beam with a large throw distance. For medium and large buildings. Available in two sizes, 20W and 40W. Different CCTs are available and also in RGBW. Choice of 3 finishes: white, black or silver DMX512 or 0-10V control. 5-year limited warranty.

Order Code

LS-ARCH-EXT-120V.240V-R- - - -


Size	CCT	Beam angle	Finish
195mm	2.7K	5°	BK (noire)
225mm	3K	10°	WH (Blanc)
	3.5K	20°	SI (Argent)
	4K	25°	
	5K	35°	
	RGBW	40°	
		60°	



Client Date Qty
Project Type PO#

LS-ARCH-EXT-120V-R

Dimensions

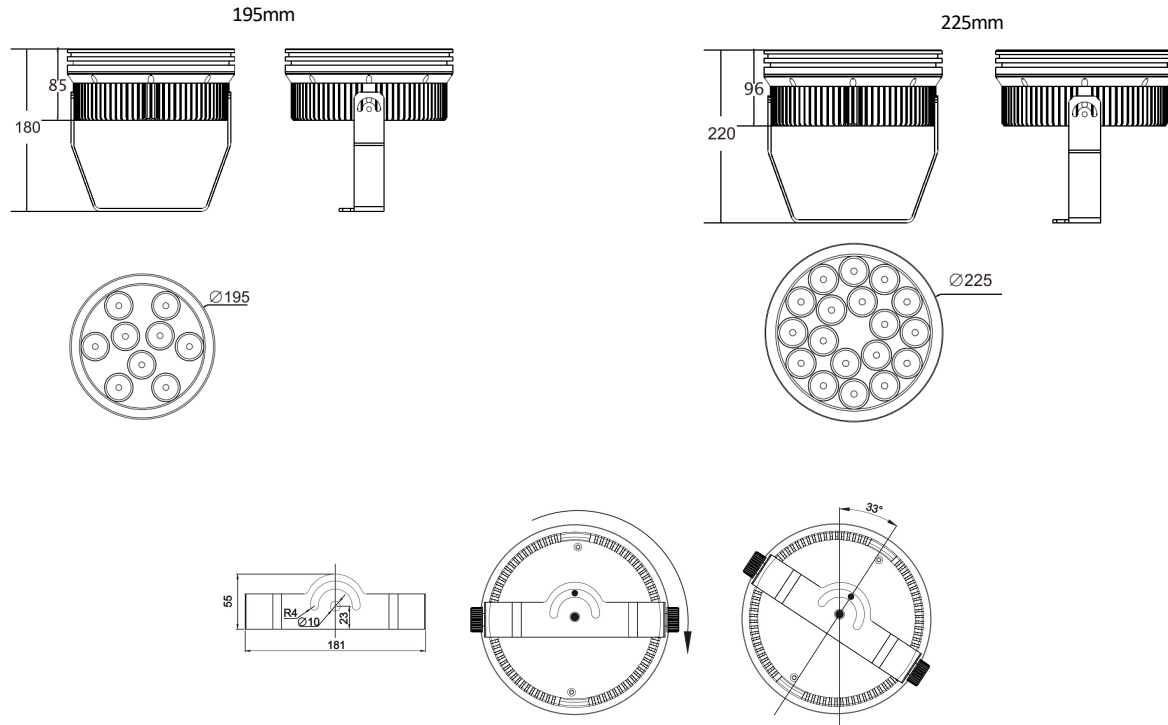


Installation



DMX Controller

Note: Max. 60 projectors on a DMX line

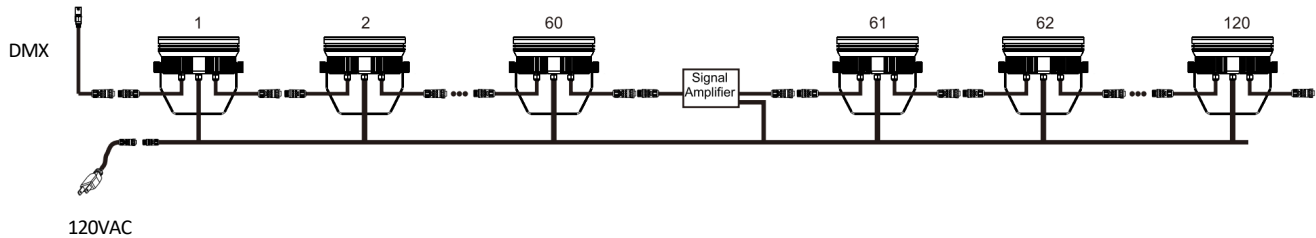




Client Date Qty
Project Type PO#


LS-ARCH-EXT-120V-R

Installation

One color (No control)

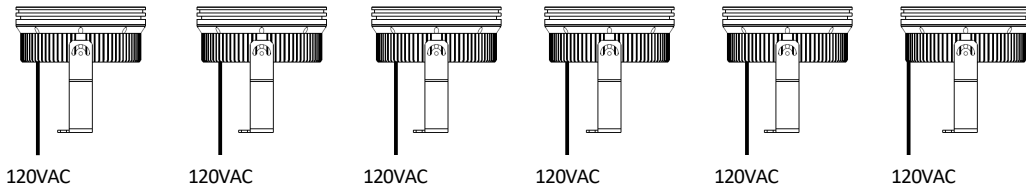

One color (0-10V)

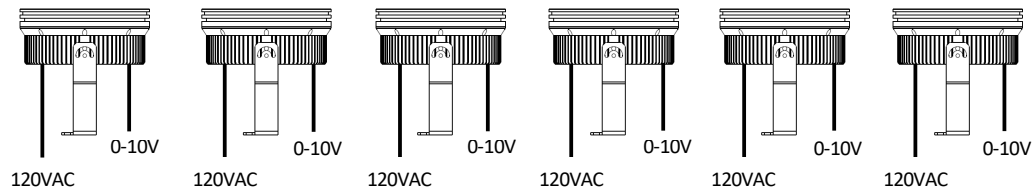

Accessories

