



Client		Date		Qty	
Project		Type		PO#	

LS-ARCH-EXT-120V-RECT-150W



Specifications

Input voltage.	120V-240VAC
Power	150W
Lumens	11930lm(RGBW)/7000lm(1 CCT)
LED Type	CREE
CCT	2.7K/3K/4K/6K/RGBW
CRI	<80
Dimensions	L400mmxW320mmxH290mm
Beam angle	5°/10°/15°/30°/45°/60°
Working Temperature	-40°C à 50°C
Protection	IP65
Couloors	Black/Silver/White/RAL
Control	0-10V, DALI, DMX512
Lifetime	50,000 hours
Garantie	5 ans

Description


High-power floodlight designed for large buildings.
Can cover 100 feet high without loss of brightness. Perfectly suited to the Canadian climate.
Different CCTs available or in RGBW.
0-10V/DALI or DMX512 (RGBW) control.




Client		Date		Qty	
Project		Type		PO#	

LS-ARCH-EXT-120V-RECT-150W

Dimensions

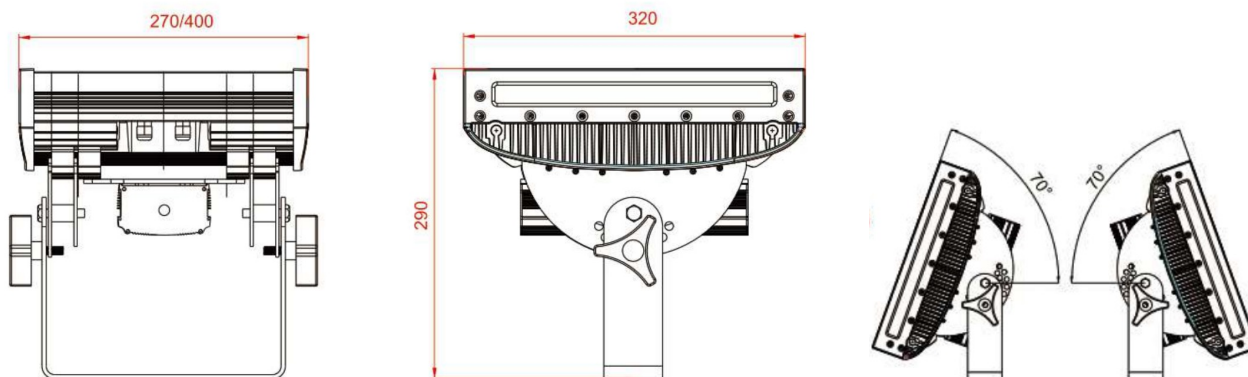

Bracket dimension

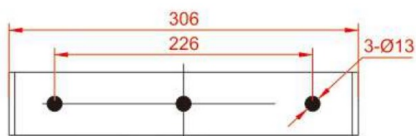

Installation

Note: Up to 30 projectors you need to use a DMX amplifier

