



Client Date Qté
Projet Type BC#

LS-ARCH-EXT-24V-LIN



Description

***** 5 YEARS WARRANTY *****

- Rugged Aluminium Chassis
- Power consumption Of 20W (1.22M)
- CCT: 2700K,3000K,3500K,4000K, 5000K or RGBW
- Compatible with DMX512 decoder
- Beam angle of 15° to 45°
- Black or silver finish
- IP65 Protection
- Great for architectural projects






Client Date Qté
Projet Type BC#


LS-ARCH-EXT-24V-LIN

Dimensions

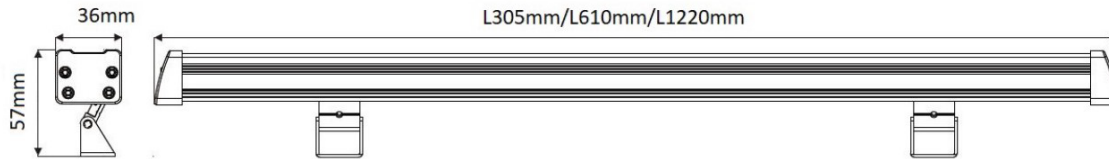


Installation

DMX MODE

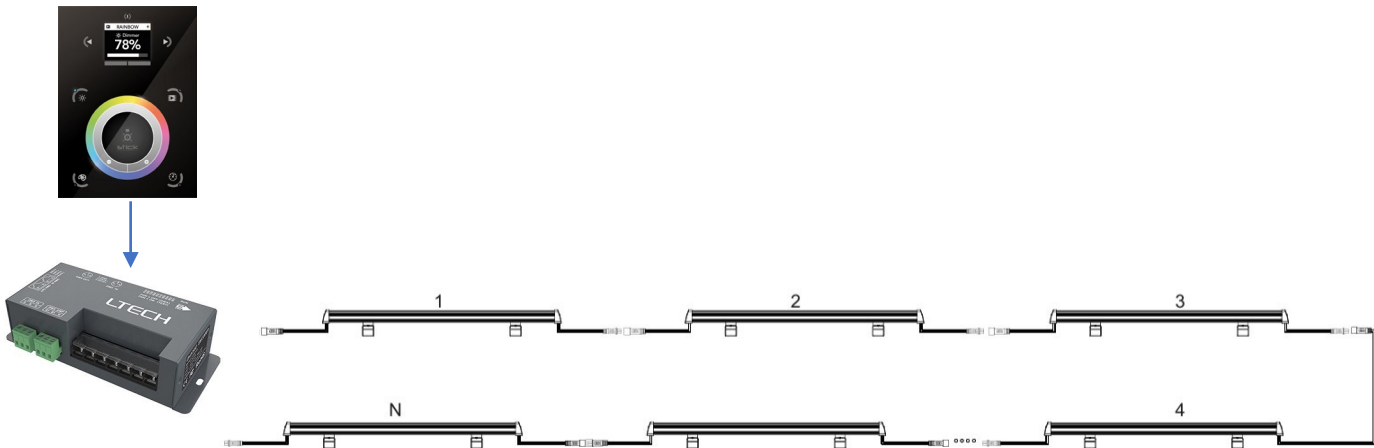

STEADY COLOR MODE

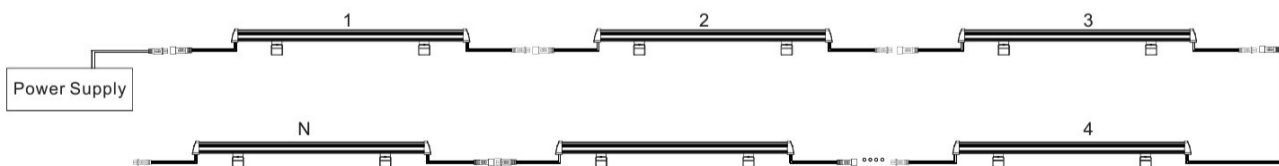




Client Date Qté
 Projet Type BC#

LS-ARCH-EXT-24V-LIN


Order table

Model	Protection	Power	Color temperature	Lumens	Diode QTY	Voltage	Beam Angle	Dimensions
LS-ARCH-EXT-24V-LIN-1.22M-2.7K	IP65	20W	2700K	840lm	48	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-1.22M-3K	IP65	20W	3000K	840lm	48	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-1.22M-3.5K	IP65	20W	3500K	840lm	48	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-1.22M-4K	IP65	20W	4000K	840lm	48	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-1.22M-5K	IP65	20W	5000K	840lm	48	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-1.22M-RGBW	IP65	20W	RGBW	520lm	48	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,6M-2.7K	IP65	10W	2700K	440lm	24	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,6M-3K	IP65	10W	3000K	440lm	24	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,6M-3.5K	IP65	10W	3500K	440lm	24	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,6M-4K	IP65	10W	4000K	440lm	24	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,6M-5K	IP65	10W	5000K	440lm	24	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,6M-RGBW	IP65	10W	RGBW	275lm	24	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,3M-2.7K	IP65	6W	2700K	240lm	12	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,3M-3K	IP65	6W	3000K	240lm	12	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,3M-3.5K	IP65	6W	3500K	240lm	12	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,3M-4K	IP65	6W	4000K	240lm	12	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,3M-5K	IP65	6W	5000K	240lm	12	24V	10,15,20,45°	See drawing
LS-ARCH-EXT-24V-LIN-0,3M-RGBW	IP65	6W	RGBW	150lm	12	24V	10,15,20,45°	See drawing


Candela Distribution

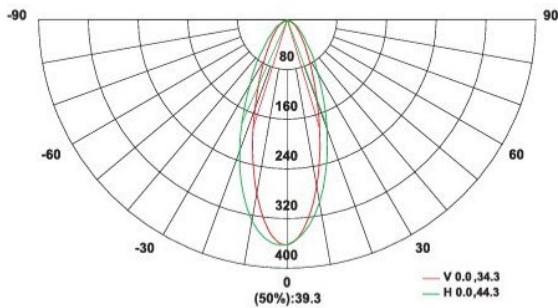


R/G/B

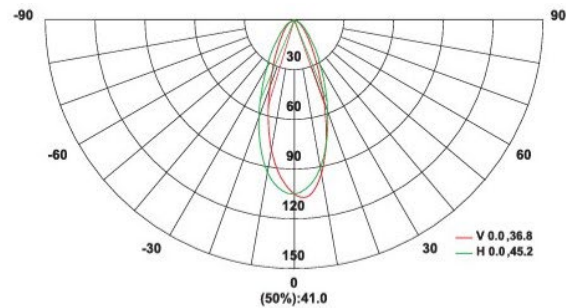

R

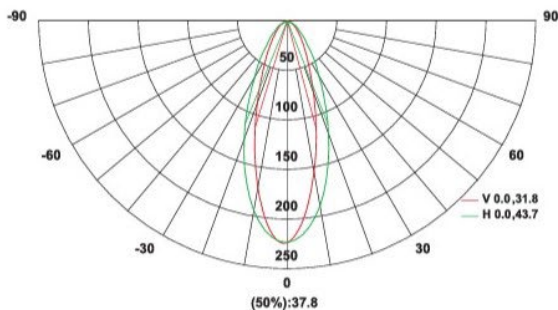

(50%):37.8

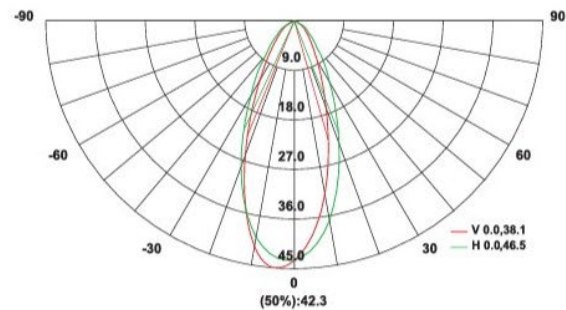


(50%):42.3




Client Date Qté
 Projet Type BC#

LS-ARCH-EXT-24V-LIN


Illuminance at distance

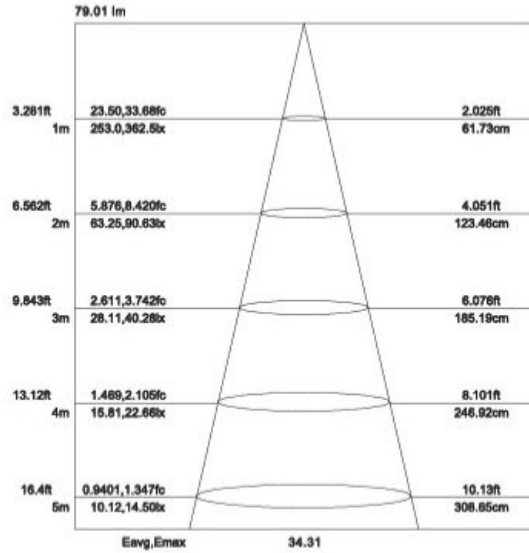


R/G/B

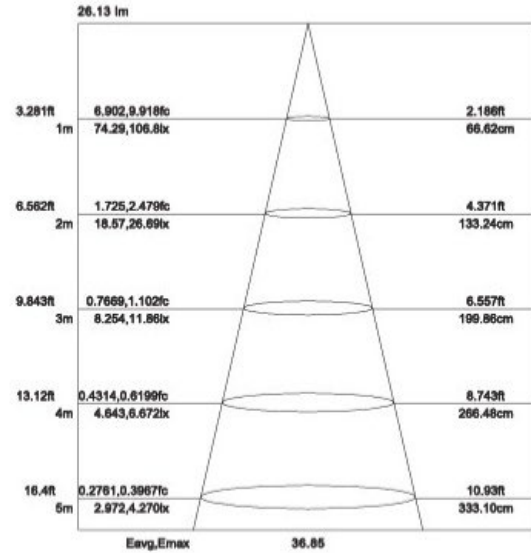

R

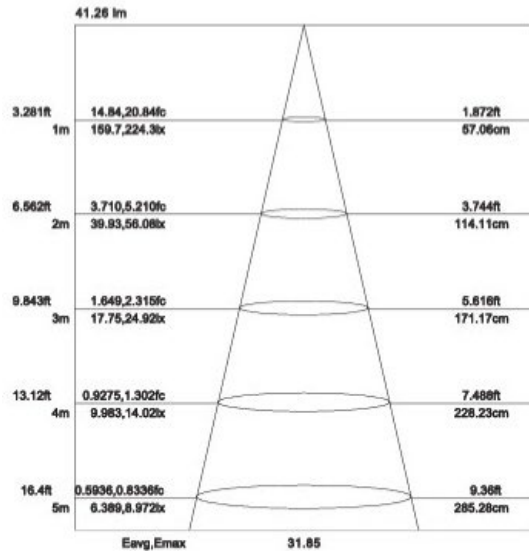

G

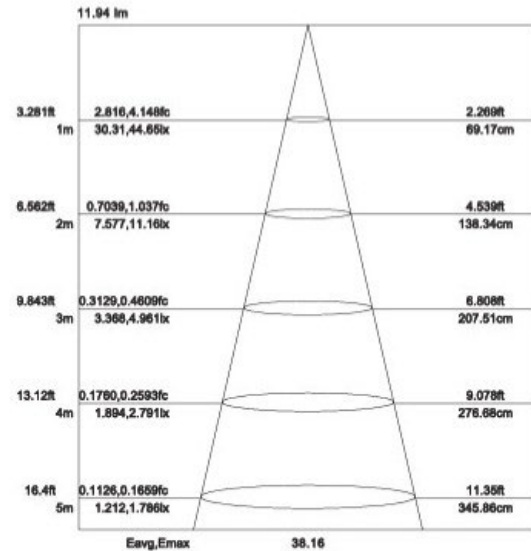

B