



Client Date Qty
Project Type PO#

LS-ARCH-EXT-FACADE-120V-LIN



Spécifications

Model	360mm	720mm	1218mm
Power	9W	18W	36W
Voltage	120V-240V	120V-240V	120V-240V
Lumens	360Lm(RGBW)-1170Lm(CCT)	720Lm(RGBW)-2340Lm(CCT)	1440Lm(RGBW)-4680Lm(CCT)
CCT	2.7K,3K,3.5K,4K,5K,RGBW	2.7K,3K,3.5K,4K,5K,RGBW	2.7K,3K,3.5K,4K,5K,RGBW
Dimensions	L314*W38*H119mm	L615*W38*H119mm	L1218*W38*H119mm
Weight	1.1Kg	1.6Kg	2.5Kg
Control	DMX512	DMX512	DMX512
Operation temperature	-40°C à 55°C	-40°C à 55°C	-40°C à 55°C
Protection	IP66	IP66	IP66

Oder code

LS-ARCH-EXT-FACADE-120V-LIN- - - - -


Length	Power	CCT	Beam angle	Finish
314mm	9W	2.7K	15°	BK (black)
615mm	18W	3K	30°	WH (white)
1218mm	36W	3.5K	45°	SI (Silver)
		4K	60°	
		5K	10*45°	
		RGBW	15*55°	
			20*40°	



Client		Date		Qty	
Project		Type		PO#	

LS-ARCH-EXT-FACADE-120V-LIN

Dimensions

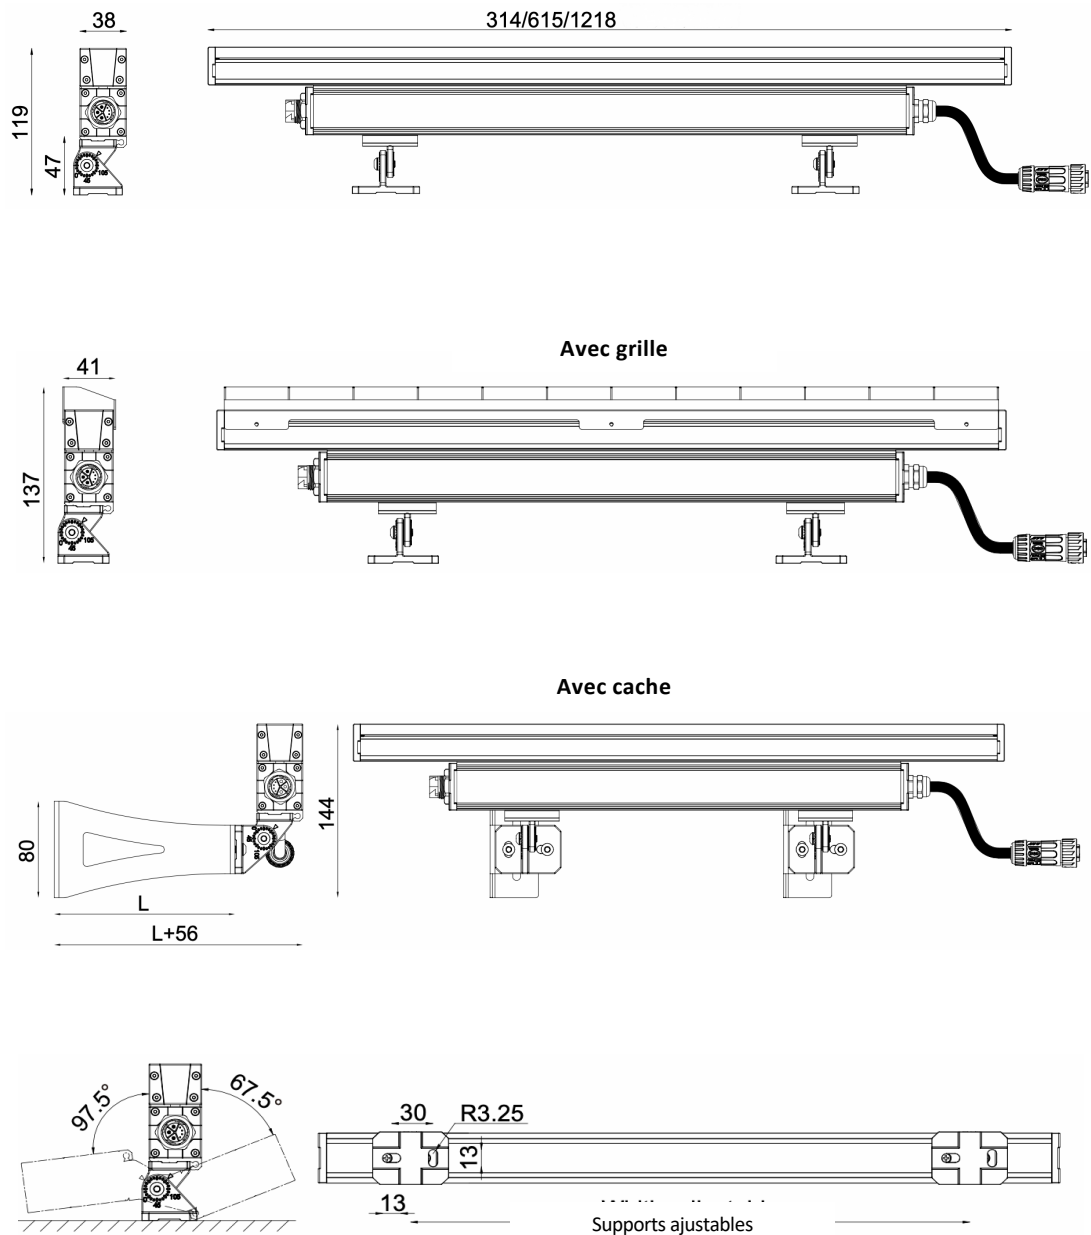



Client

Date

Qty


Project

Type

PO#

LS-ARCH-EXT-FACADE-120V-LIN

Accessories

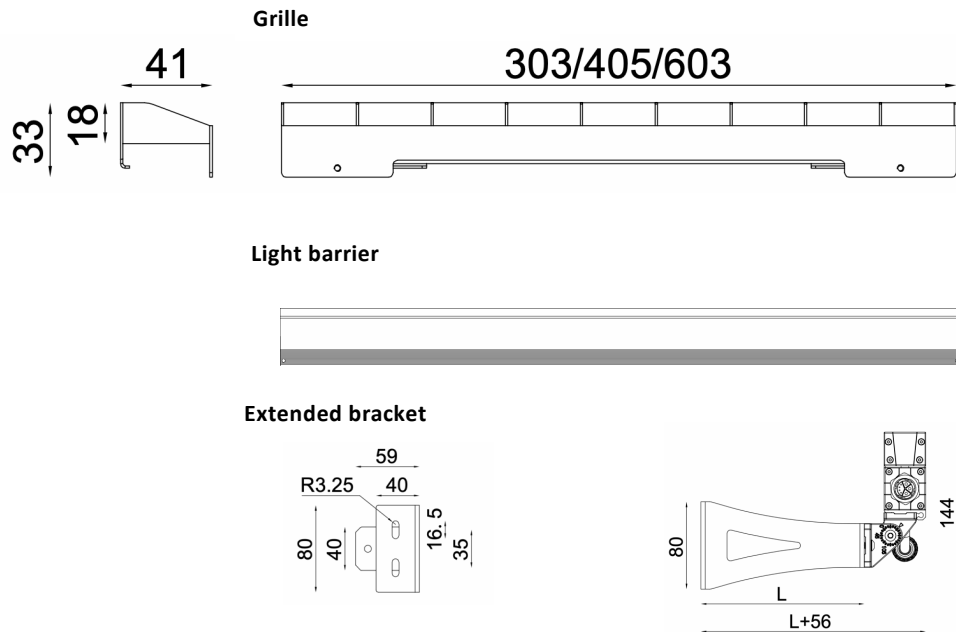

Installation

