



Client

Date

Qty

Project

Type

PO#

LS-ARCH-EXT-FACADE-24V-LIN



Specifications

Model	313mm	615mm	1218mm
Power	9W	18W	36W
Voltage	24VDC	24VDC	24VDC
Lumens	300Lm(RGBW)-1170Lm(CCT)	720Lm(RGBW)-2340Lm(CCT)	1440Lm(RGBW)-4680Lm(CCT)
CCT	2.7K,3K,3.5K,4K,5K,RGBW	2.7K,3K,3.5K,4K,5K,RGBW	2.7K,3K,3.5K,4K,5K,RGBW
Dimensions	L313*W38*H80mm	L615*W38*H80mm	L1218*W38*H80mm
Weight	0.32Kg	0.64Kg	1.28Kg
Control	DMX512	DMX512	DMX512
Working temperature	-40°C à 55°C	-40°C à 55°C	-40°C à 55°C
Protection	IP66	IP66	IP66


Orde code

	Lenght	Power	CCT	Beam angle	Finish
LS-ARCH-EXT-FACADE-24V-LIN-					
	314mm	9W	2.7K	15°	BK (black)
	615mm	18W	3K	30°	WH (white)
	1218mm	36W	3.5K	45°	SI (Silver)
			4K	60°	
			5K	30*40°	
			RGBW-DMX	20*40°	


Client Date Qty Project Type PO#

LS-ARCH-EXT-FACADE-24V-LIN

Dimensions

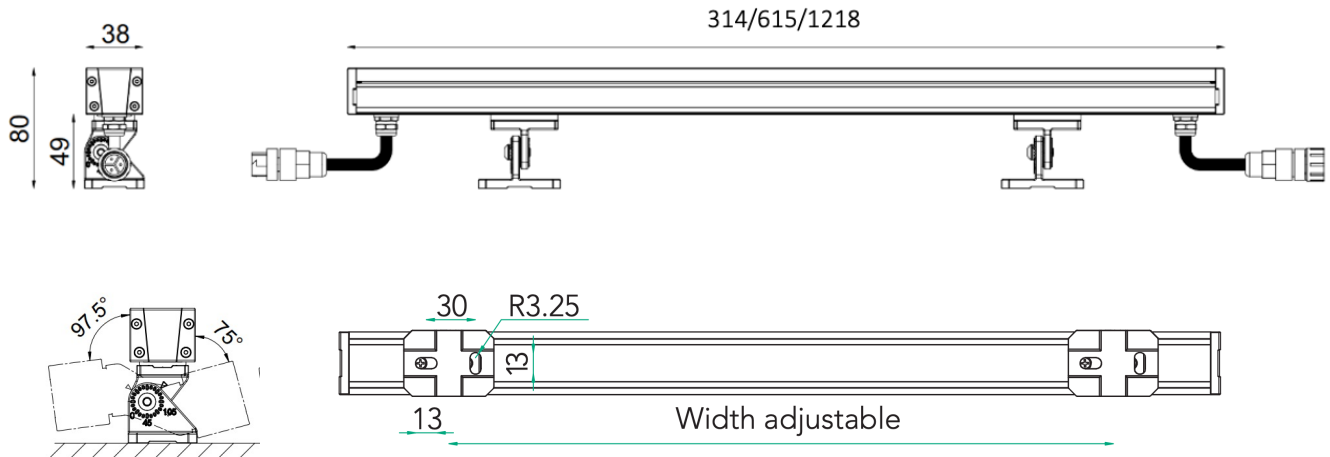

Installation



DMX Controller

DMX SIGNAL

DMX RGBW

Note: Max. 4 projectors in & out

24VDC

24VDC

ONE COLOR

24VDC