



Project Name : _____ Type : _____ Date : _____ Watt : _____

Notes : _____

Features :

- ❑ 24 channels DMX512 LED interface
- ❑ Work for 5V to 24V DC
- ❑ Socket, XLR 3-pin or RJ45 as DMX connector
- ❑ No flicking system for television studio
- ❑ For architectural, concert, museum or commercial installations

Certifications :

- ❑ In accord with certifications in effect in Canada and USA

Warranty :


- ❑ The LS-CON-DEC-DMX-24S-3A has a 5 years warranty.

*See our policy on our website
www.borealux.com

Purchase Options :

Product Code	Input Voltage	Output Voltage	Watt / Channel	Watt Maximum	Amp	Channels	Metric Dimensions (L x l x h)	Imperial Dimensions (L x l x h)
LS-CON-DEC-DMX-24S-3A	5V~24V DC	5V~24V DC	0~72W x 24ch	1728W	3A x 24ch 72A Max	24	See drawings*	See drawings*

Dimensions :

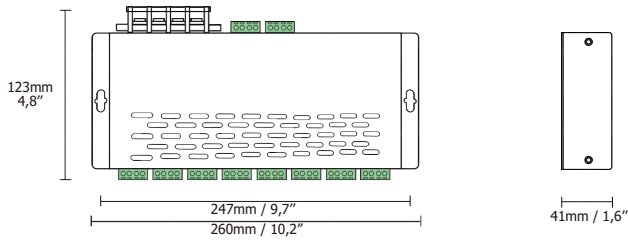

Installations :

