

Project Name : _____ Type : _____ Date : _____ Watt : _____

Notes : _____

Features :

- ❑ Power input 120V CA 60hz
- ❑ Lifetime of 50 000 hours
- ❑ CCT of 3000K, 3500K or 4000K
- ❑ Beam angle of 30 degrees
- ❑ Choice of black or white finishes
- ❑ Dimmable with all kind of dimmer
- ❑ Dimming totally smooth
- ❑ Gimbal head on 360°
- ❑ IC type for installation in isolated ceiling
- ❑ Installation in damp locations

Certifications :

- ❑ In accord with certifications in effect in Canada and USA

Warranty :

- ❑ The LS-ENC-DIRECT120V-GIMB-R-100MM has a 5 years warranty.



*See our policy on our website
www.borealux.com

Purchase Options :

Product #	Voltage	Watt	CCT	Lumen	Beam Angle	Metric Dimensions (L x l x h)	Imperial Dimensions (L x l x h)	Drilling Hole Diameter
LS-ENC-DIRECT120V-GIMB-R-100MM-3K-WH	120V	7.1W	3000K	751lm	30°	See drawings*	See drawings*	ø85mm
LS-ENC-DIRECT120V-GIMB-R-100MM-3K-BL	120V	7.1W	3000K	751lm	30°	See drawings*	See drawings*	ø85mm
LS-ENC-DIRECT120V-GIMB-R-100MM-4K-WH	120V	7.1W	4000K	751lm	30°	See drawings*	See drawings*	ø85mm
LS-ENC-DIRECT120V-GIMB-R-100MM-4K-BL	120V	7.1W	4000K	751lm	30°	See drawings*	See drawings*	ø85mm

Photometric Diagram :

LS-ENC-DIRECT-120V-GIMB-R-100mm

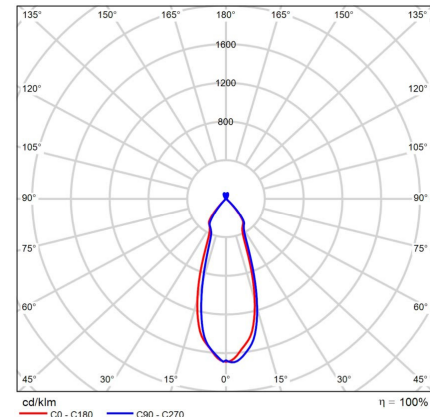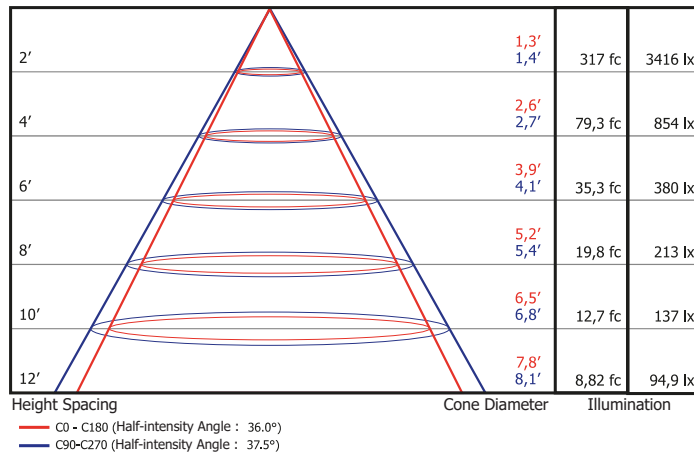


Finishes :

LS-ENC-DIRECT120V-GIMB-R-100MM-XXK-WH




LS-ENC-DIRECT120V-GIMB-R-100MM-XXK-BL

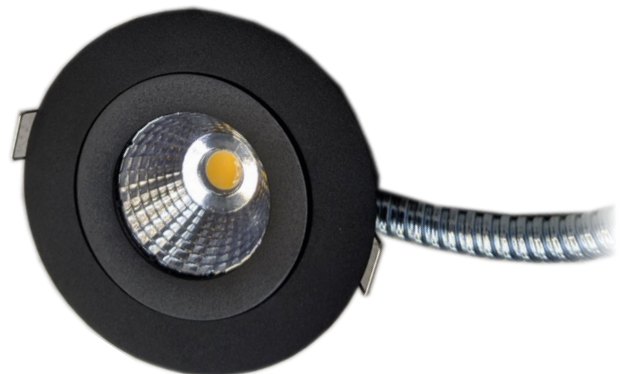


Dimensions :


Top View

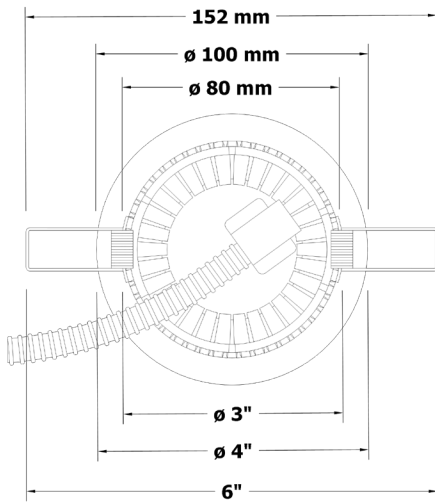

Bottom View

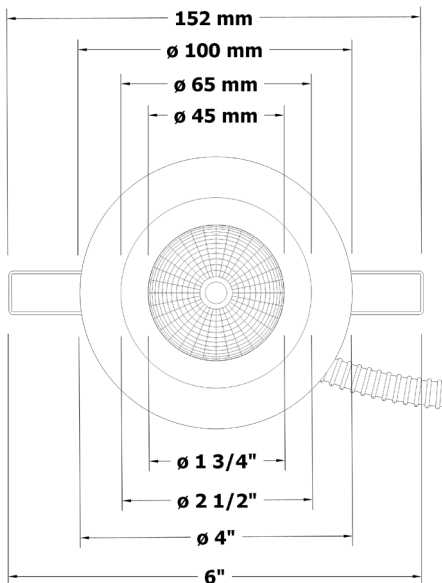

Side View

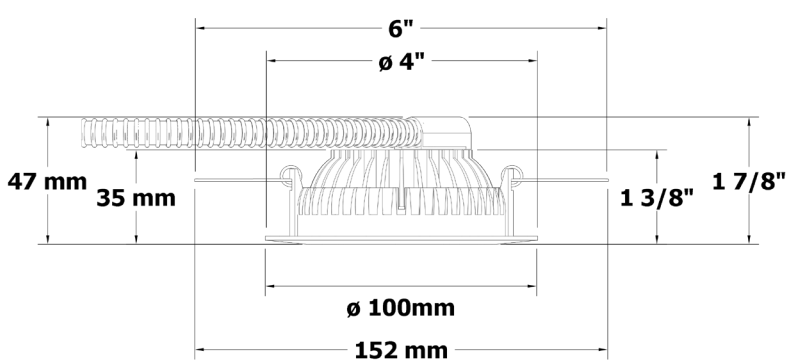


120V Cable



Plastic Body

Reflector

Lens

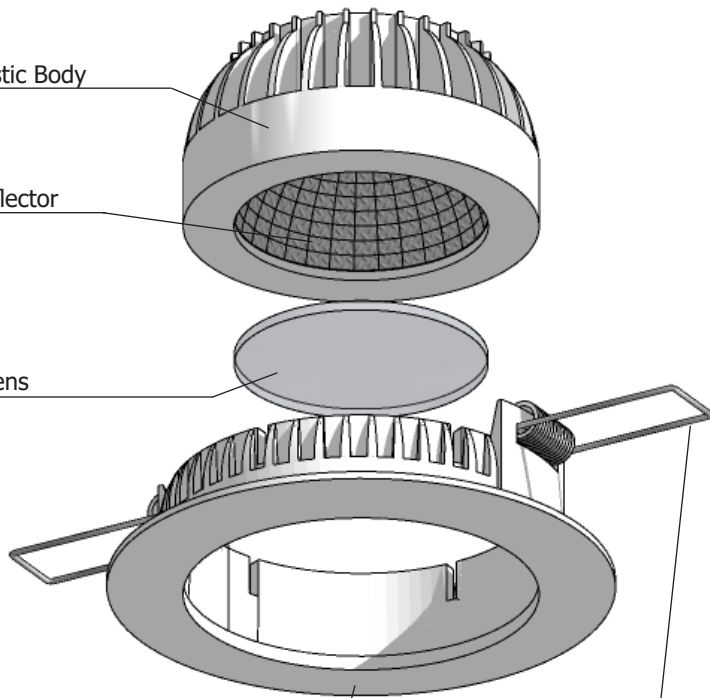

Plastic Base Finish

Spring Clip