


**DIMMABLE • 5-IN-1**

# Power Supply LS-PSU12V/24V-5in1 series

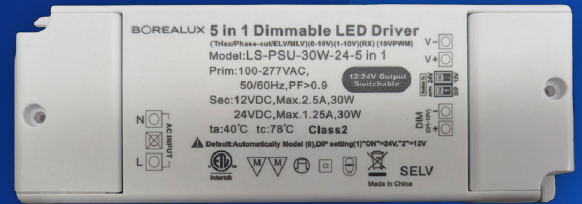

## Main Features

**Input Voltage:** 100–277 VAC universal

**High Efficiency:** up to 92%

**Protection Rating:** IP20 — flicker-free

**Installation:** dry or damp locations

**Power Range:** 30W · 60W

**Power Factor:** PF > 0.9


**Cooling:** natural air convection

**Connection:** lever-action, input/output


## Specifications by Model

POWER	MODEL	INPUT	OUTPUT	CURRENT	PF	DIMENSIONS (MM)	IP	WARRANTY
30W	LS-PSU-12V/24V-30W-5in1	100–277 VAC	12V 24V	2.5 A 1.25 A	> 0.9	160 × 58 × 20	IP20	5 years
60W	LS-PSU-12V/24V-60W-5in1	100–277 VAC	12V 24V	5 A 2.5 A	> 0.9	185 × 63.5 × 22	IP20	5 years


## Built-in Protections




Short Circuit



Overload



Over Current



Over Temperature

## Dimmer Compatibility (5-in-1)

0-10V

1-10V

Triac

PWM

MLV

## Certifications & Compliance











## Warranty



**5-Year Warranty**

Certified product — compliant with architectural lighting standards. Full coverage against manufacturing and material defects.