



Client Date Qty
 Project Type PO#

LS-STRIP-MINI-24V-200LM

LED TAPE



IP 20 **IP 67**



Description




- **CRI 80+**
- **SMD**
- **50 000hrs Lifetime**
- **5 years warranty**
- **3-Step MacAdam's ellipse, single binning**
- **Reverse connection protection**
- **IP20 or IP67 Protection**

Technical specifications

Model	Protection	Power	CCT	Lumens	LED per foot	Input voltage	Beam angle	Maximum length	Width
LS-STRIP-MINI-24V-200LM-2,7K	IP20/IP67	2,5W/ft	2700K	200lm/ft	70pcs/ft	24V	120°	32 ft	4mm
LS-STRIP-MINI-24V-200LM-3K	IP20/IP67	2,5W/ft	3000K	200lm/ft	70pcs/ft	24V	120°	32 ft	4mm
LS-STRIP-MINI-24V-200LM-3,5K	IP20/IP67	2,5W/ft	3500K	200lm/ft	70pcs/ft	24V	120°	32 ft	4mm
LS-STRIP-MINI24V-200LM-4K	IP20/IP67	2,5W/ft	4000K	200lm/ft	70pcs/ft	24V	120°	32 ft	4mm
LS-STRIP-MINI-24V-200LM-5K	IP20/IP67	2,5W/ft	5000K	200lm/ft	70pcs/ft	24V	120°	32 ft	4mm

Dimensions

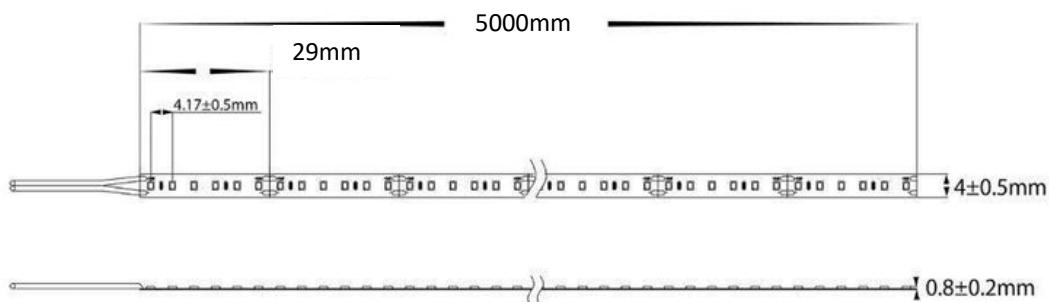




Client Date Qty
 Project Type PO#

LS-STRIP-MINI-24V-200LM

LED TAPE

Photometric test

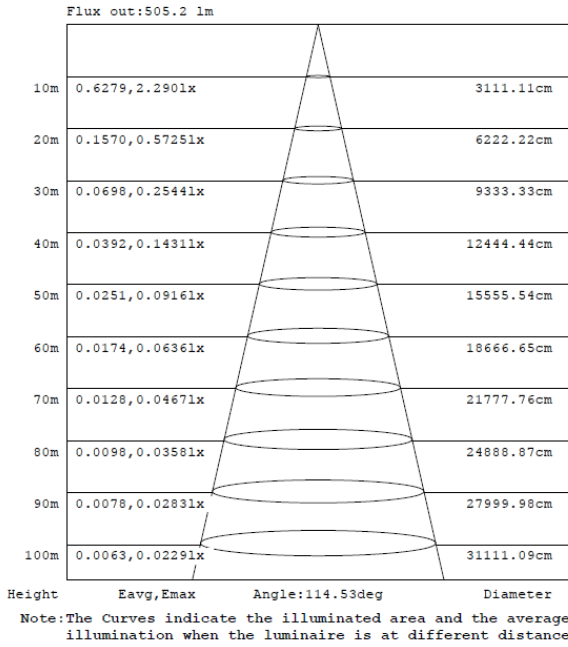

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

