



Client

Date

Qté

Projet

Type

BC#

LS-ARCH-EXT-FACADE-120V-LIN



Spécifications

Modèle	360mm	720mm	1218mm
Puissance	9W	18W	36W
Voltage	120V-240V	120V-240V	120V-240V
Lumens	360Lm(RGBW)-1170Lm(CCT)	720Lm(RGBW)-2340Lm(CCT)	1440Lm(RGBW)-4680Lm(CCT)
CCT	2.7K,3K,3.5K,4K,5K,RGBW	2.7K,3K,3.5K,4K,5K,RGBW	2.7K,3K,3.5K,4K,5K,RGBW
Dimensions	L314*W38*H119mm	L615*W38*H119mm	L1218*W38*H119mm
Poids	1.1Kg	1.6Kg	2.5Kg
Contrôle	DMX512	DMX512	DMX512
Température d'opération	-40°C à 55°C	-40°C à 55°C	-40°C à 55°C
Protection	IP66	IP66	IP66

Code de commande

	Longueur	Puissance	CCT	Angle d'ouverture	Finition
LS-ARCH-EXT-FACADE-120V-LIN-					
	314mm	9W	2.7K	15°	BK (noire)
	615mm	18W	3K	30°	WH (Blanc)
	1218mm	36W	3.5K	45°	SI (Argent)
			4K	60°	
			5K	10*45°	
			RGBW	15*55°	
				20*40°	



Client

Date

Qté


Projet

Type

BC#

LS-ARCH-EXT-FACADE-120V-LIN

Dimensions

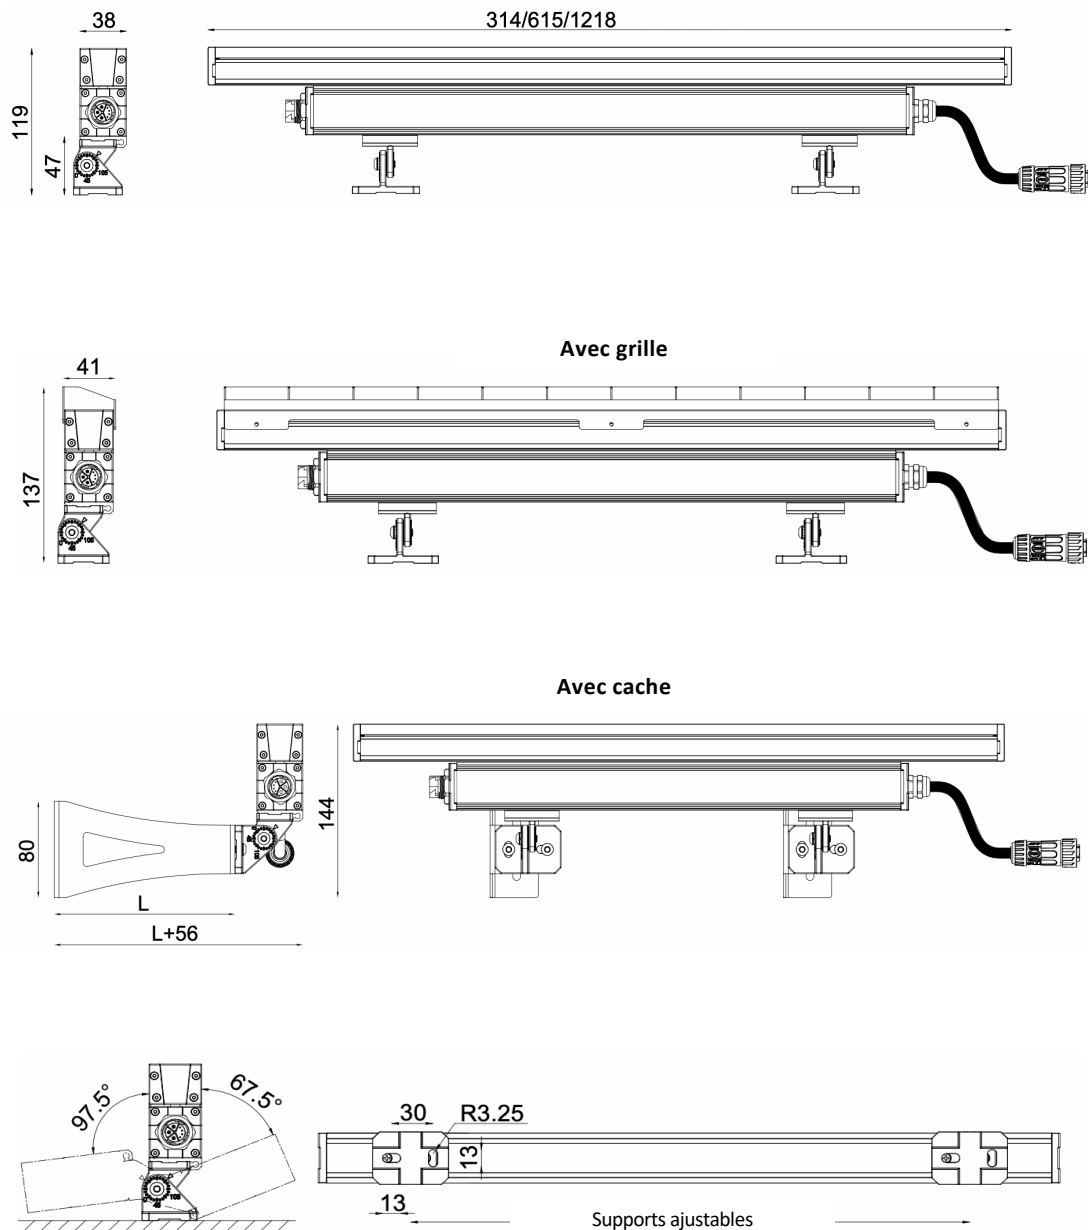



Client

Date

Qté


Projet

Type

BC#

LS-ARCH-EXT-FACADE-120V-LIN

Accessoires

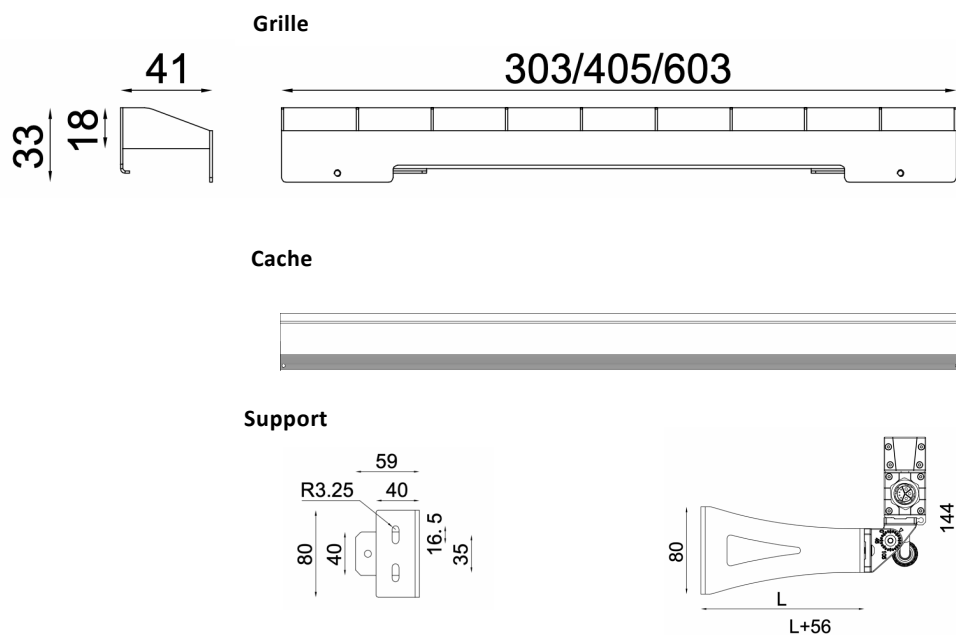

Installation

