

Project Name : _____ Type : _____ Date : _____ Watt : _____

Notes : _____

Features :

- ❑ Power input 12V CC
- ❑ Low power consumption of 3W
- ❑ CCT of 3000K, 4000K or 5000K
- ❑ Dimming by 12V dimmer
- ❑ Beam angle of 110 degrees
- ❑ White or Silver finishes
- ❑ Simple and easy installation in tight places

Certifications :

- ❑ In accord with certifications in effect in Canada and USA

Warranty :


- ❑ The LS-ENC-12V-SUR-R-xxK-xx has a 5 years warranty

*See our policy on our website
www.borealux.com


Purchase Options :

Product #	Voltage	Watt	CCT	Lumen	Beam Angle	Metric Dimensions (L x l x h)	Imperial Dimensions (L x l x h)	Finish
LS-ENC-12V-SUR-R-3000K-SI	12V	3W	3000K	210lm	110°	See Drawings*	See Drawings*	Silver
LS-ENC-12V-SUR-R-3000K-WH	12V	3W	3000K	210lm	110°	See Drawings*	See Drawings*	White
LS-ENC-12V-SUR-R-4000K-SI	12V	3W	4000K	240lm	110°	See Drawings*	See Drawings*	Silver
LS-ENC-12V-SUR-R-5000K-SI	12V	3W	5000K	240lm	110°	See Drawings*	See Drawings*	Silver
LS-ENC-12V-SUR-R-5000K-WH	12V	3W	5000K	240lm	110°	See Drawings*	See Drawings*	White

Branchement :

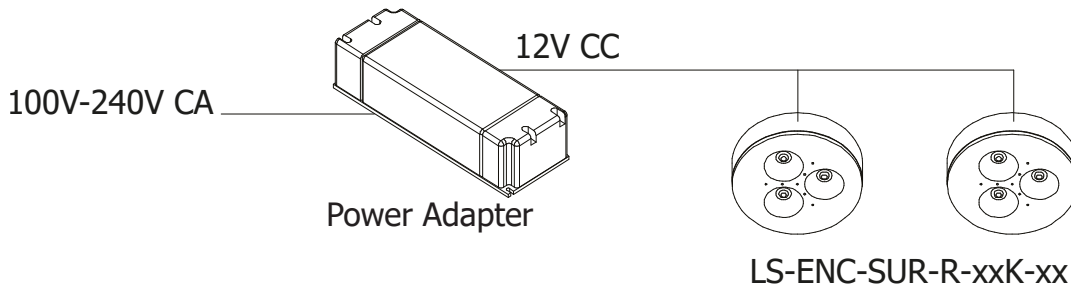

Dimensions :

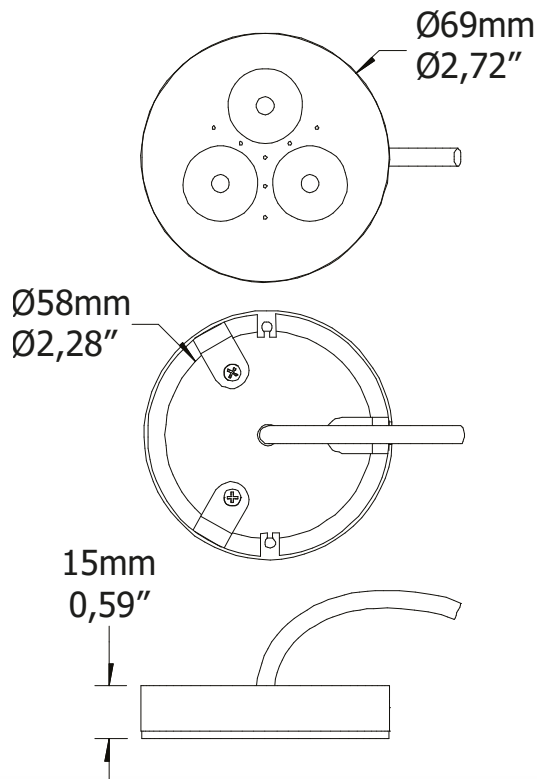

Installation :

